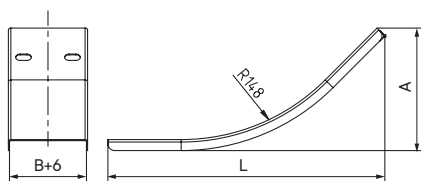


Крышка на угол вертикальный внутренний 45° с толщиной стали 2,0 мм

**Назначение**

- защита кабелей от внешних воздействий.

Характеристики

- толщина стали – 2,0 мм;
- исп. 1 – сталь, оцинкованная по методу Сендзимира;
- исп. 2 – горячее цинкование погружением после изготовления;
- исп. 4 – цинк-ламельное покрытие;
- исп. 7 – алюминиевый сплав 5000 серии.

Особенности

- поставляется в комплекте с крепежными элементами.

Высота Н, мм	Ширина В, мм	А, мм	Код, исп. 1	Код, исп. 2	Код, исп. 4	Код, исп. 7
50	50	98	SKKH505K	SKKH505KHDZ	SKKH505KZL	AKSKH505K
	100	98	SKKH510K	SKKH510KHDZ	SKKH510KZL	AKSKH510K
	150	98	SKKH515K	SKKH515KHDZ	SKKH515KZL	AKSKH515K
	200	98	SKKH520K	SKKH520KHDZ	SKKH520KZL	AKSKH520K
	300	98	SKKH530K	SKKH530KHDZ	SKKH530KZL	AKSKH530K
	400	98	SKKH540K	SKKH540KHDZ	SKKH540KZL	AKSKH540K
	500	98	SKKH550K	SKKH550KHDZ	SKKH550KZL	AKSKH550K
80	600	98	SKKH560K	SKKH560KHDZ	SKKH560KZL	AKSKH560K
	80	89	SKKH808K	SKKH808KHDZ	SKKH808KZL	AKSKH808K
	100	89	SKKH810K	SKKH810KHDZ	SKKH810KZL	AKSKH810K
	150	89	SKKH815K	SKKH815KHDZ	SKKH815KZL	AKSKH815K
	200	89	SKKH820K	SKKH820KHDZ	SKKH820KZL	AKSKH820K
	300	89	SKKH830K	SKKH830KHDZ	SKKH830KZL	AKSKH830K
	400	89	SKKH840K	SKKH840KHDZ	SKKH840KZL	AKSKH840K
100	500	89	SKKH850K	SKKH850KHDZ	SKKH850KZL	AKSKH850K
	600	89	SKKH860K	SKKH860KHDZ	SKKH860KZL	AKSKH860K
	100	83	SKKH1010K	SKKH1010KHDZ	SKKH1010KZL	AKSKH1010K
	150	83	SKKH1015K	SKKH1015KHDZ	SKKH1015KZL	AKSKH1015K
	200	83	SKKH1020K	SKKH1020KHDZ	SKKH1020KZL	AKSKH1020K
	300	83	SKKH1030K	SKKH1030KHDZ	SKKH1030KZL	AKSKH1030K
	400	83	SKKH1040K	SKKH1040KHDZ	SKKH1040KZL	AKSKH1040K
500	83	SKKH1050K	SKKH1050KHDZ	SKKH1050KZL	AKSKH1050K	
600	83	SKKH1060K	SKKH1060KHDZ	SKKH1060KZL	AKSKH1060K	